

SiC MOSFET driver power supply



RoHS



FEATURES

- Reinforced insulation
- I/O isolation test voltage: 5.0kVAC
- Partial Discharge 1700V
- Characterised CMTI>200kV/μs
- Max. Capacitive Load: 2200μF
- Ultra-low isolation capacitance: 3.5pF (typ.)
- High efficiency up to 87%
- SIP package
- Operating ambient temperature range: -40°C to +105°C
- Continuous short-circuit protection

QAxx3C-R3 is DC-DC module power supply designed for SiC MOSFET driver requiring two sets of isolation power supply. The mode of common ground outputs is adopted internally for better energy provision of SiC MOSFET turn-on and turn-off. Output short-circuit protection and self-recovery capabilities are also provided. General application includes:

1. Universal converter
2. AC servo drive system
3. Electric welding machine
4. Uninterruptible power supply (UPS)

Selection Guide

| Part No. | Input | | Output | | Full Load Efficiency (%) Typ. | Max. Capacitive Load(μF) |
|---------------|----------------------|-------------------------------------|-------------------------|------------------------|-------------------------------|--------------------------|
| | Voltage(VDC) (Range) | Current(mA, Typ.) Full Load/No Load | Voltage (VDC) +Vo1/+Vo2 | Current (mA) +Io1/+Io2 | | |
| QA053C-1505R3 | 5 (4.5-5.5) | 343/20 | +15/-5 | +80/-40 | 78/82 | 1000 |
| QA053C-2004R3 | 5 (4.5-5.5) | 407/18 | +20/-4 | +80/-40 | | 470 |
| QA053C-1803R3 | 5 (4.5-5.5) | 415/20 | +18/-3.5 | +80/-80 | | 680 |
| QA123C-1502R3 | 12 (10.8-13.2) | 167/8 | +15/-2.5 | +100/-100 | 82/87 | 2200 |
| QA123C-1803R3 | 12 (10.8-13.2) | 200/8 | +18/-3 | | | 1000 |
| QA123C-1504R3 | 12 (10.8-13.2) | 215/8 | +15/-4 | +120/-120 | 82/87 | 2200 |
| QA153C-1504R3 | 15 (13.5-16.5) | 171/8 | | | | 2200 |
| QA243C-1504R3 | 24 (21.6-26.4) | 131/10 | | | | 2200 |
| QA123C-2005R3 | 12 (10.8-13.2) | 213/14 | +20/-5 | +90/-90 | 82/87 | 470 |
| QA153C-2005R3 | 15 (13.5-16.5) | 167/8 | | | | 2200 |
| QA243C-2005R3 | 24 (21.6-26.4) | 129/11 | | | | 2200 |

Note:*The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

| Item | Operating Conditions | | | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------|----|--|--------------------|------|------|------|
| Input Voltage (1sec. max.) | Vin=5VDC | DC | | -0.7 | -- | 9 | VDC |
| | Vin=12VDC | DC | | -0.7 | -- | 18 | |
| | Vin=15VDC | DC | | -0.7 | -- | 21 | |
| | Vin=24VDC | DC | | -0.7 | -- | 30 | |
| Input Filter | | | | Capacitance Filter | | | |

| | | |
|----------|--|-------------|
| Hot Plug | | Unavailable |
|----------|--|-------------|

Output Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit | |
|--------------------------|----------------------|-----------------------------------|---|-------|-------|-------|-----|
| Output Voltage | QA053C-1505R3 | +Vo | Vin=5VDC, Pin6 & Pin7 +Io= +80mA | 14.55 | 15.3 | 16.05 | VDC |
| | | -Vo | Vin=5VDC, Pin5 & Pin6 -Io= -40mA | -4.45 | -4.7 | -4.95 | |
| | QA053C-2004R3 | +Vo | Vin=5VDC, Pin6 & Pin7 +Io= +80mA | 18.8 | 19.8 | 20.8 | |
| | | -Vo | Vin=5VDC, Pin5 & Pin6 -Io= -40mA | -3.8 | -4 | -4.2 | |
| | QA053C-1803R3 | +Vo | Vin=5VDC, Pin6 & Pin7 +Io= +80mA | 16.74 | 17.64 | 18.54 | |
| | | -Vo | Vin=5VDC, Pin5 & Pin6 -Io= -80mA | -3.13 | -3.3 | -3.67 | |
| | QA123C-1502R3 | +Vo | Vin=12VDC, Pin6 & Pin7 +Io= +100mA | 13.86 | 14.61 | 15.36 | |
| | | -Vo | Vin=12VDC, Pin5 & Pin6 -Io= -100mA | -2.28 | -2.40 | -2.53 | |
| | QA123C-1803R3 | +Vo | Vin=12VDC, Pin6 & Pin7 +Io= +100mA | 17.10 | 18.00 | 18.90 | |
| | | -Vo | Vin=12VDC, Pin5 & Pin6 -Io= -100mA | -3.00 | -3.15 | -3.30 | |
| | QA123C-1504R3 | +Vo | Vin=12VDC, Pin6 & Pin7 +Io= +120mA | 14.25 | 15.00 | 15.75 | |
| | | -Vo | Vin=12VDC, Pin5 & Pin6 -Io= -120mA | -3.60 | -3.80 | -4.00 | |
| | QA123C-2005R3 | +Vo | Vin=12VDC, Pin6 & Pin7 +Io= +90mA | 18.50 | 19.50 | 20.50 | |
| | | -Vo | Vin=12VDC, Pin5 & Pin6 -Io= -90mA | -4.95 | -5.20 | -5.45 | |
| | QA153C-1504R3 | +Vo | Vin=15VDC, Pin6 & Pin7 +Io= +120mA | 13.76 | 14.51 | 15.26 | |
| | | -Vo | Vin=15VDC, Pin5 & Pin6 -Io= -120mA | -3.80 | -4.00 | -4.20 | |
| | QA153C-2005R3 | +Vo | Vin=15VDC, Pin6 & Pin7 +Io= +90mA | 18.50 | 19.50 | 20.50 | |
| | | -Vo | Vin=15VDC, Pin5 & Pin6 -Io= -90mA | -4.95 | -5.20 | -5.45 | |
| | QA243C-1504R3 | +Vo | Vin=24VDC, Pin6 & Pin7 +Io= +120mA | 14.55 | 15.30 | 16.05 | |
| | | -Vo | Vin=24VDC, Pin5 & Pin6 -Io= -120mA | -3.96 | -4.16 | -4.36 | |
| QA243C-2005R3 | +Vo | Vin=24VDC, Pin6 & Pin7 +Io= +90mA | 19.00 | 20.00 | 21.00 | | |
| | -Vo | Vin=24VDC, Pin5 & Pin6 -Io= -90mA | -4.75 | -5.00 | -5.25 | | |
| Voltage Accuracy | | 10% - 100% load | See output regulation curve (Fig. 3 to24) | | | | |
| Linear Regulation | 5V Input model | Full voltage input range | +Vo Output | -- | ±1.1 | ±1.4 | -- |
| | | | -Vo Output | -- | ±1.1 | ±1.4 | |
| | Other model | | +Vo Output | -- | ±1.1 | ±1.5 | |
| | | | -Vo Output | -- | ±1.1 | ±1.5 | |
| Load Regulation | 5V Input model | 10% - 100% load | +Vo Output | -- | 8 | 15 | % |
| | | | -Vo Output | -- | 10 | 15 | |
| | QA123C-1502R3 | | +Vo Output | -- | 8 | 17 | |
| | | | -Vo Output | -- | 13 | 17 | |
| | Other model | | +Vo Output | -- | 6 | 15 | |
| | | | -Vo Output | -- | 8 | 15 | |
| Temperature Coefficient | | Full load | -- | ±0.04 | ±0.1 | %/°C | |
| Ripple & Noise* | 5V Input model | 20MHz bandwidth | -- | 50 | 150 | mVp-p | |
| | Other model | | -- | 50 | 100 | | |
| Short-circuit Protection | | | Continuous, self-recovery | | | | |

Note:* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|-------------------|---|------|------|------|------|
| Isolation | Input-output, Test for 1 minute with a leakage current of 1mA max | 5000 | -- | -- | VAC |
| Partial Discharge | Input- output (According to IEC61800-5-1) | 1700 | -- | -- | V |

| | | | | | |
|--------------------------------------|---|------|-----|-----|---------|
| CMTI | Input-output | ±200 | -- | -- | kV/μs |
| Insulation Resistance | Input-output resistance at 500VDC | 1000 | -- | -- | MΩ |
| Isolation capacitor | Input-output, capacitor at 100kHz/0.1V | -- | 3.5 | 5 | pF |
| Operating Temperature | Derating when operating temperature ≥ 85°C, (see Fig. 2) | -40 | -- | 105 | °C |
| Storage Temperature | | -55 | -- | 125 | |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from case for 10s seconds | -- | -- | 300 | |
| Case Temperature Rise | Ta=25°C, nominal input voltage, full load | -- | 30 | 60 | |
| Storage Humidity | Non-condensing | 5 | -- | 95 | %RH |
| Switching Frequency | Full load, nominal input voltage | -- | 200 | -- | kHz |
| MTBF | MIL-HDBK-217F@25°C | 3500 | -- | -- | k hours |

Mechanical Specifications

| | |
|----------------|---|
| Case Material | Black plastic; flame-retardant and heat-resistant |
| Dimensions | 19.50 x 9.80 x 12.50mm |
| Weight | 4.3g(Typ.) |
| Cooling Method | Free air convection |

Electromagnetic Compatibility (EMC)

| | | | | |
|-----------|-----|-------------------|-----------------|---|
| Emissions | CE | 5V Input model | CISPR32/EN55032 | CLASS B (see Fig. 33 for recommended circuit) |
| | | Other Input model | CISPR32/EN55032 | CLASS A (see Fig. 32 for recommended circuit) |
| | RE | 5V Input model | CISPR32/EN55032 | CLASS A (see Fig. 32 for recommended circuit) |
| | | Other Input model | CISPR32/EN55032 | CLASS B (see Fig. 33 for recommended circuit) |
| Immunity | ESD | 5V Input model | IEC/EN61000-4-2 | Contact ±6kV perf. Criteria B |
| | | Other Input model | IEC/EN61000-4-2 | Contact ±8kV perf. Criteria B |

Typical Characteristic Curves

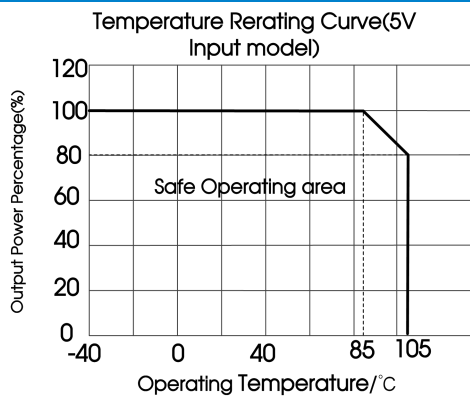


Fig. 1

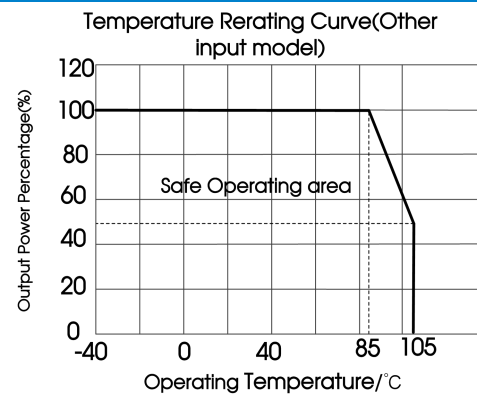


Fig. 2

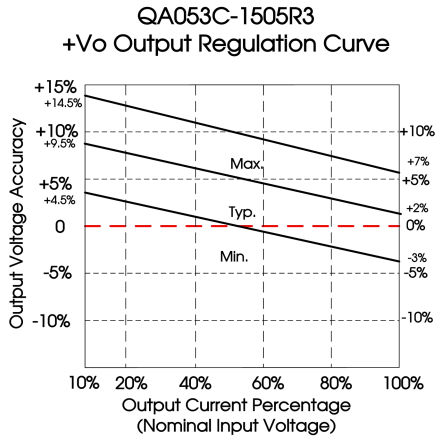


Fig. 3

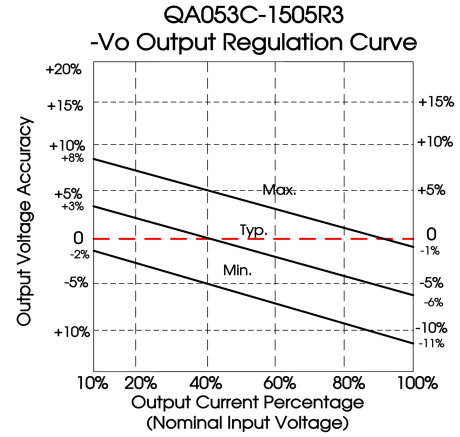


Fig. 4

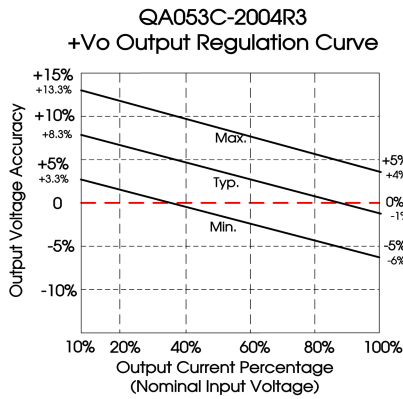


Fig. 5

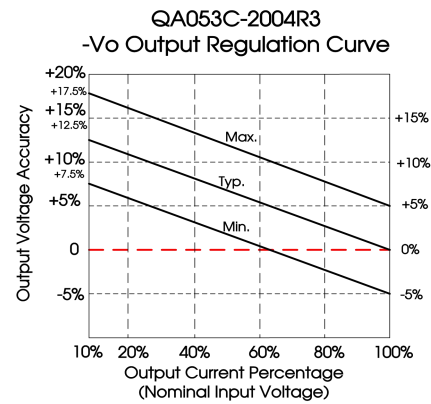


Fig. 6

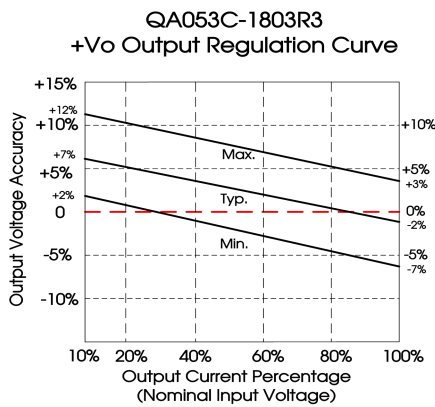


Fig. 7

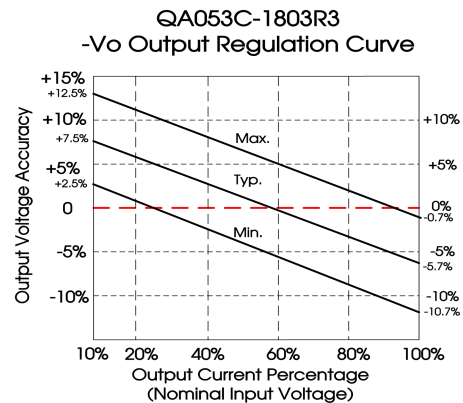


Fig. 8

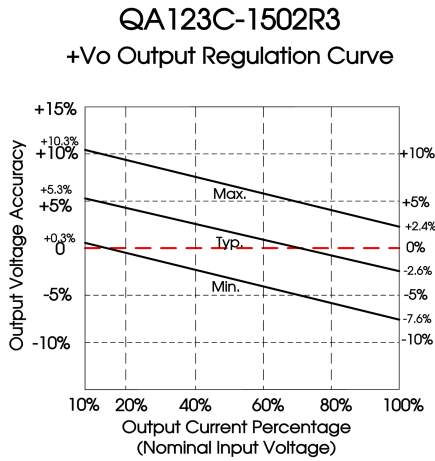


Fig. 9

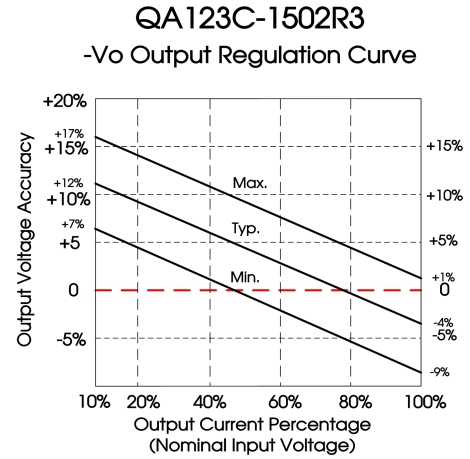


Fig. 10

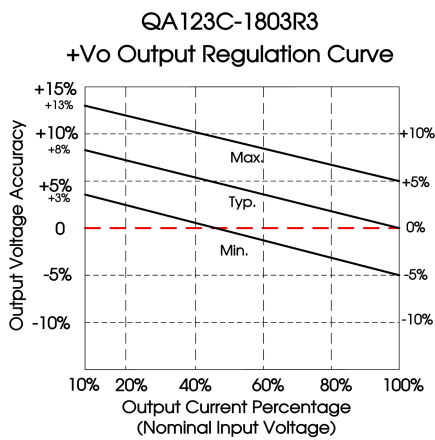


Fig. 11

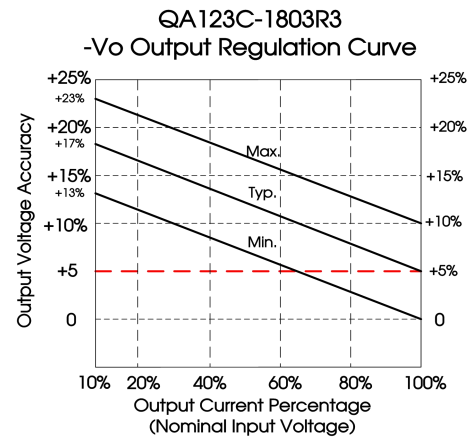


Fig. 12

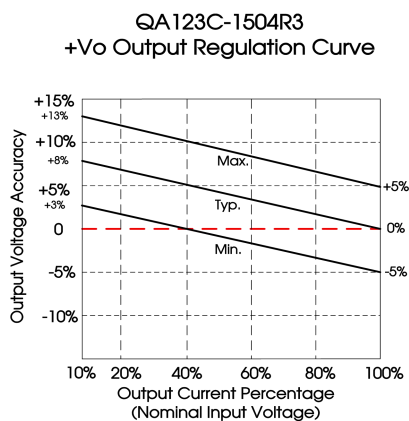


Fig. 13

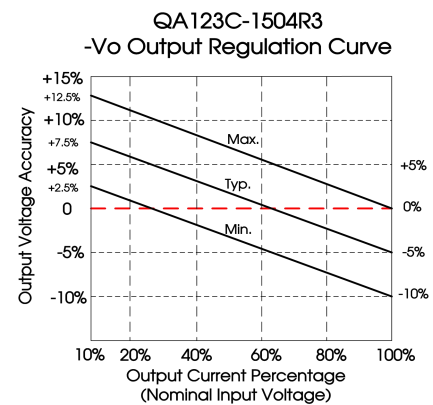


Fig. 14

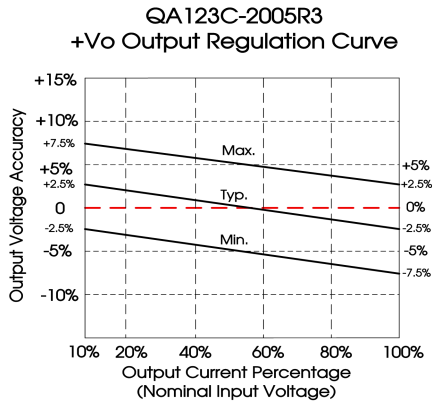


Fig. 15

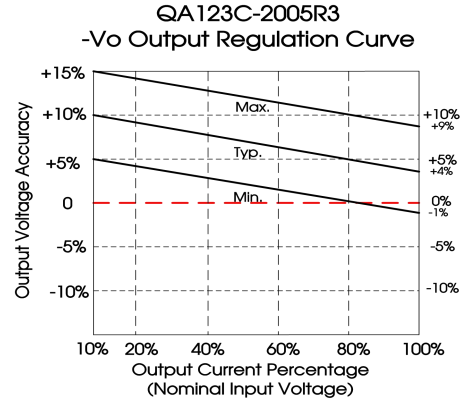


Fig. 16

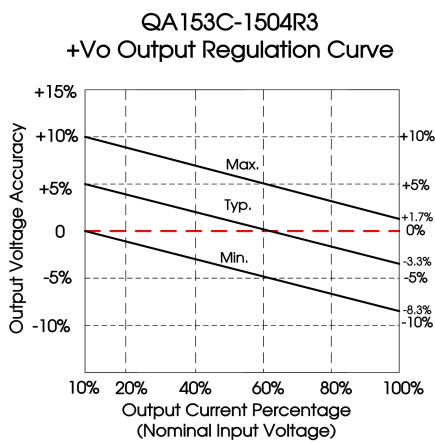


Fig. 17

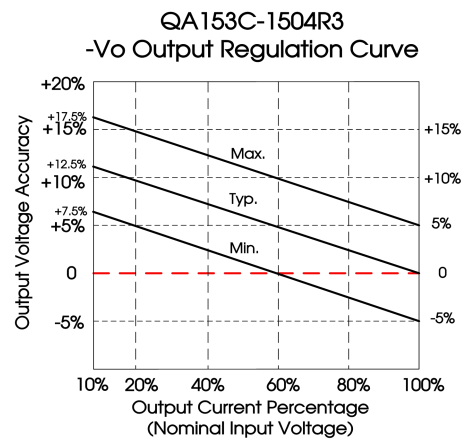


Fig. 18

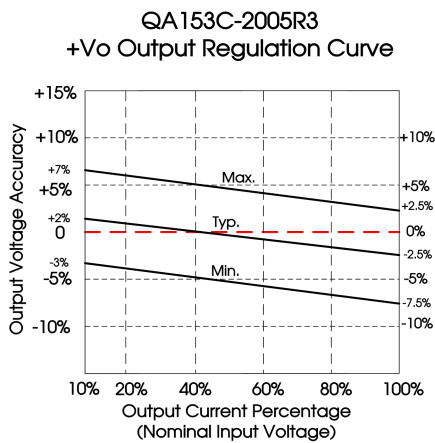


Fig. 19

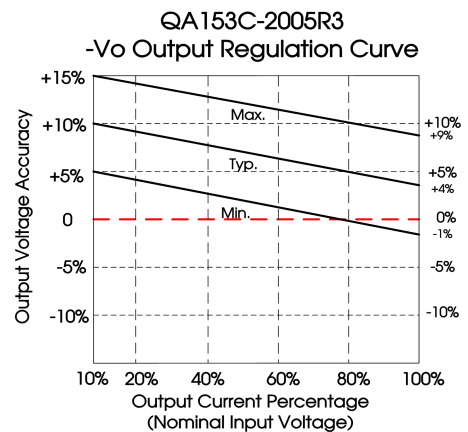


Fig. 20

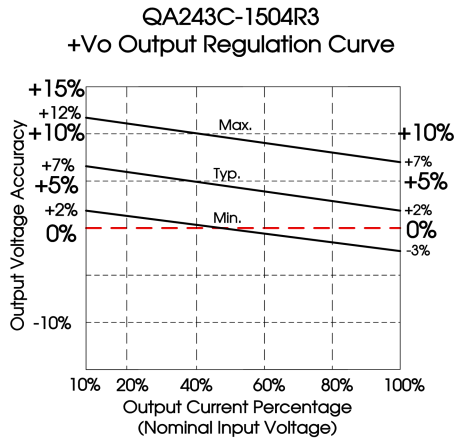


Fig. 21

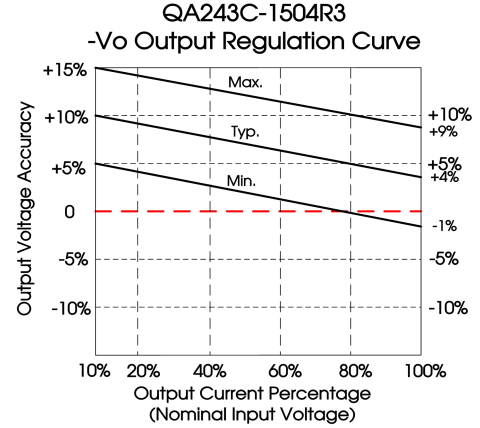


Fig. 22

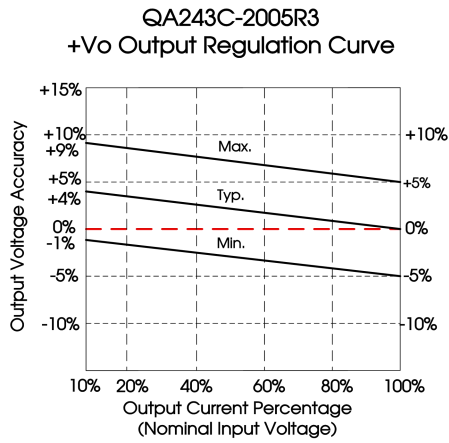


Fig. 23

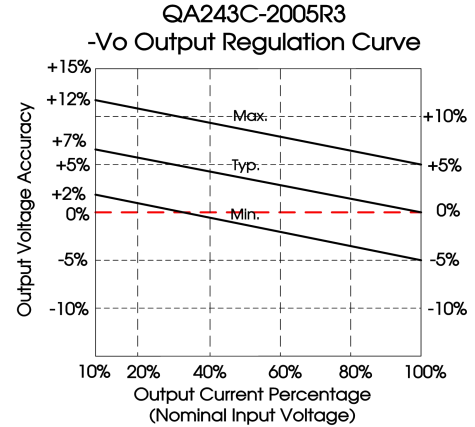


Fig. 24

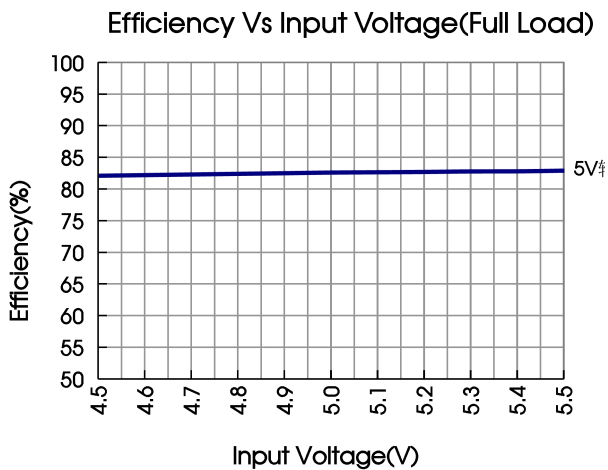


Fig. 25

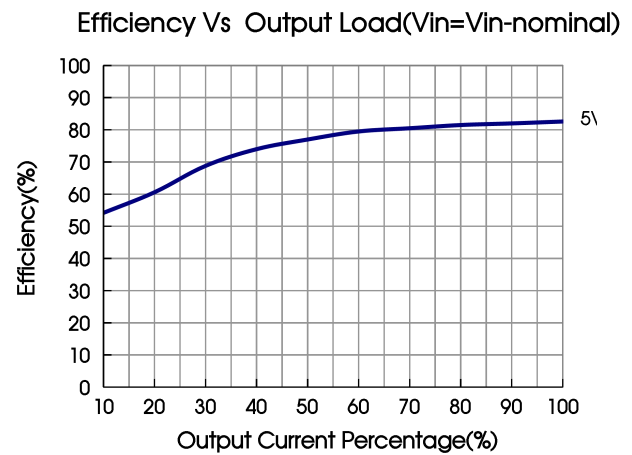


Fig. 26

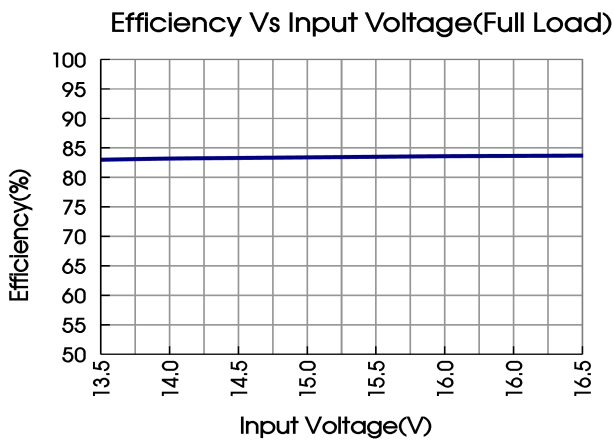


Fig. 27

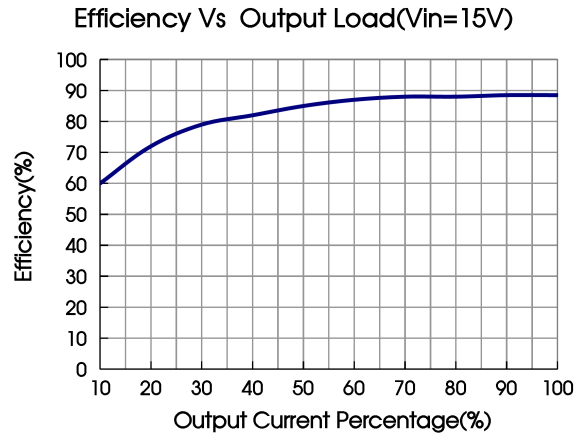


Fig. 28

Note: Take QA053C-1505R3 and QA153C-2005R3 as an example, other models can be corresponding reference

Design Reference

1. Test configurations

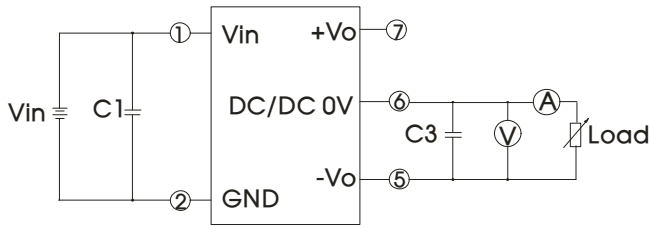


Fig. 29

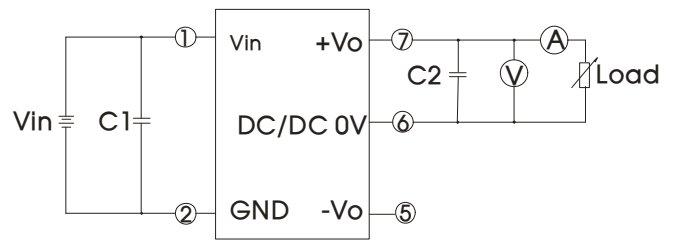


Fig. 30

Note: C1, C2, C3: 100μF/35V(Low internal resistance)

2. Typical application

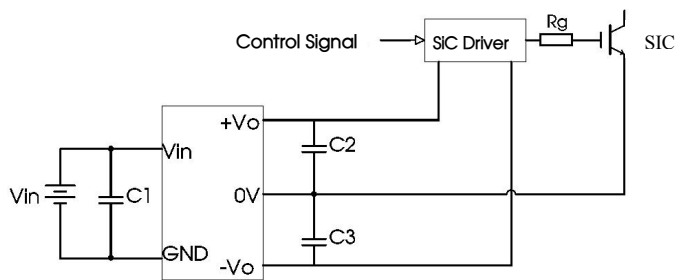


Fig. 31

| |
|---------------------------|
| C1/C2/C3 |
| 100μF/35V(Low resistance) |

3. EMC typical recommended circuit

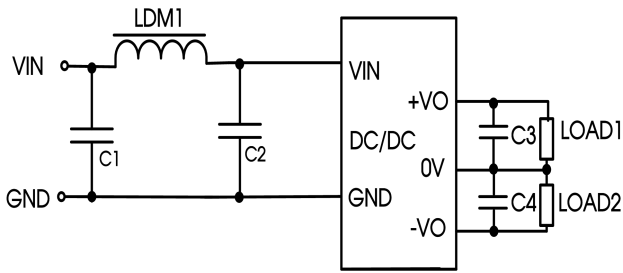


Fig. 32

| Device selection | | | |
|------------------|-------|-------------------------------|-------------------------------|
| Project | | 5V Input model | Other Input model |
| EMI | C1/C2 | 4.7μF /16V | 1μF/50V |
| | C3/C4 | 10μF /50V (Low resistance) | 100μF/30V (Low resistance) |
| | LDM | 6.8μH | 33μH |

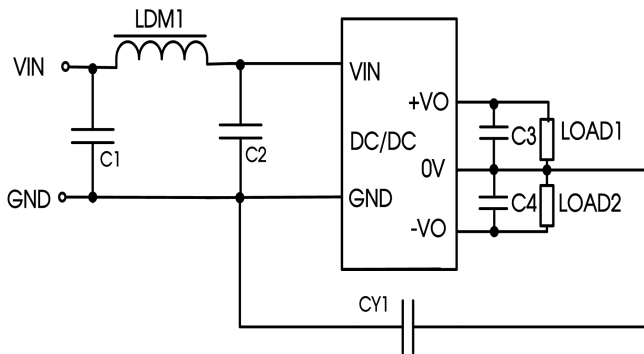




Fig. 33

| Device selection (5V Input model) | | | |
|-----------------------------------|-------|----------------------------|--|
| EMI | C1/C2 | 4.7μF /16V | |
| | C3/C4 | 10μF /50V (Low resistance) | |
| | LDM | 6.8μH | |
| | CY1 | 330pF | |

4. Electrolytic capacitors are recommended for external capacitors at the input or output of the product. Tantalum capacitors are not, otherwise there is a risk of failure.
5. The products do not support parallel connection of their output for power expansion purpose or hot-plug.
6. For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

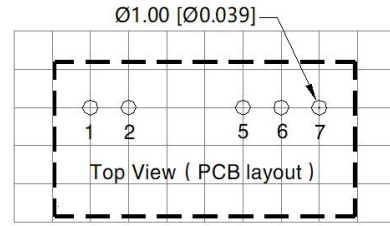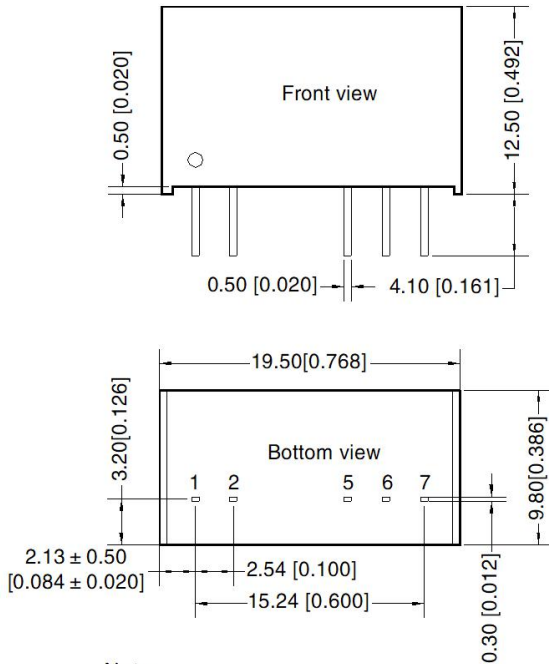

Note: Grid 2.54*2.54mm

| Pin-Out | |
|---------|------|
| Pin | Mark |
| 1 | Vin |
| 2 | GND |
| 5 | -Vo |
| 6 | 0V |
| 7 | +Vo |

Note:
Unit: mm[inch]
Pin section tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200013;
2. The lead connecting the power supply module and SiC driver should be as short as possible during use;
3. The output filtering capacitor should be as close as possible to the power supply module and SiC driver;
4. The peak of the SiC driver gate drive current is high, so low internal resistance electrolytic capacitor is recommended to be used for the power supply module output filter capacitor;
5. The average output power of the driver must be lower than that of the power supply module;
6. Consider fixing with glue near the module if being used in vibration occasion;
7. The maximum capacitive load offered were tested at nominal input voltage and full load;
8. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
9. All index testing methods in this datasheet are based on company corporate standards;
10. The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
11. We can provide product customization service, please contact our technicians directly for specific information;
12. Products are related to laws and regulations: see "Features" and "EMC".
13. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com